



電感包裝方式

Web: www.token.com.tw

<mailto:rfq@token.com.tw>

德鍵電子工業股份有限公司


臺灣: 臺灣省新北市五股區中興路一段 137 號
電話: +886 2981 0109 傳真: +886 2988 7487

大陸: 廣東省深圳市南山區創業路中興工業城綜合樓 12 樓
電話: +86 755 26055363; 傳真: +86 755 26055365



▶ 貼片電感線圈包裝規格尺寸


貼片電感線圈包裝規格尺寸

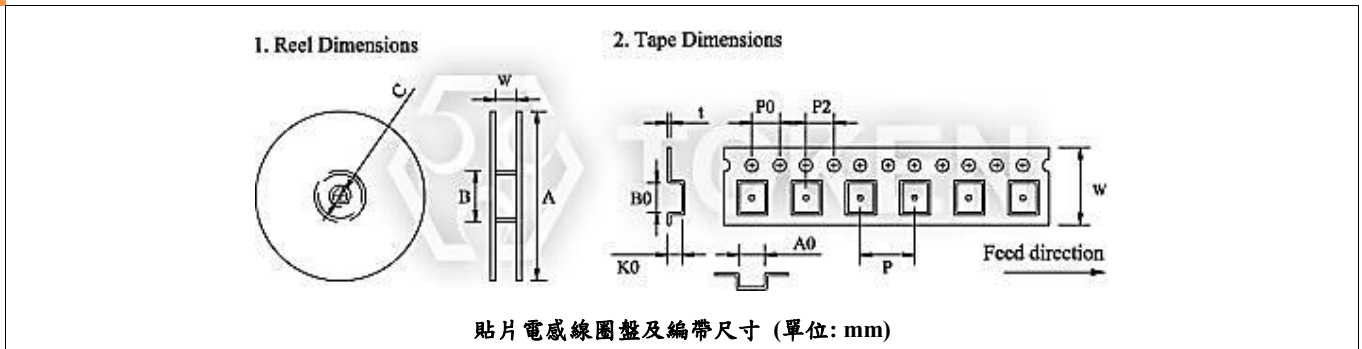


貼片電感線圈盤及編帶尺寸 (單位: mm)

| 德鍵電子貼片電感線圈型號 | 每盤個數 | | 盤尺寸 | | | | 編帶尺寸 | | | | | | | |
|---------------------------|--------|------|-----|----|----|----|------|------|------|---|----|----|----|------|
| | Φ178 | Φ330 | A | B | C | W | A0 | B0 | K0 | P | P0 | P2 | W | t |
| 繞線貼片電感壓模式系列 (CM) | | | | | | | | | | | | | | |
| TRCM322522 | 2,000 | - | 178 | 60 | 13 | 9 | 2.80 | 3.50 | 2.30 | 4 | 4 | 2 | 8 | 0.30 |
| TRCM453232 | 500 | - | 178 | 60 | 13 | 13 | 3.60 | 4.90 | 3.20 | 8 | 4 | 2 | 12 | 0.30 |
| 貼片繞線電感表面貼裝式系列 (EC) | | | | | | | | | | | | | | |
| TREC322522 | 2,000 | - | 178 | 50 | 13 | 10 | 2.88 | 3.65 | 2.50 | 4 | 4 | 2 | 8 | 0.26 |
| TREC453232 | 500 | - | 178 | 50 | 13 | 14 | 3.31 | 4.95 | 3.50 | 8 | 4 | 2 | 12 | 0.35 |
| 貼片繞線電感表面貼裝式系列 (EM) | | | | | | | | | | | | | | |
| TREM322522 | 2,000 | - | 178 | 50 | 13 | 10 | 2.88 | 3.65 | 2.50 | 4 | 4 | 2 | 8 | 0.26 |
| TREM453232 | 500 | - | 178 | 50 | 13 | 14 | 3.31 | 4.95 | 3.50 | 8 | 4 | 2 | 12 | 0.35 |
| 貼片迭層射頻電感系列 (MF) | | | | | | | | | | | | | | |
| TRMF100505 | 10,000 | - | 178 | 60 | 13 | 9 | 0.65 | 1.12 | 0.60 | 2 | 4 | 2 | 8 | - |
| TRMF160808 | 4,000 | - | 178 | 60 | 13 | 9 | 1.10 | 1.80 | 0.95 | 4 | 4 | 2 | 8 | - |
| 貼片射頻迭層電感系列 (MI) | | | | | | | | | | | | | | |
| TRMI160808 | 4,000 | - | 178 | 60 | 13 | 9 | 1.05 | 1.85 | 0.95 | 4 | 4 | 2 | 8 | - |
| TRMI201209 | 4,000 | - | 178 | 60 | 13 | 9 | 1.58 | 2.42 | 0.95 | 4 | 4 | 2 | 8 | - |
| TRMI201212 | 3,000 | - | 178 | 60 | 13 | 12 | 1.35 | 2.25 | 1.35 | 4 | 4 | 2 | 8 | 0.22 |
| TRMI321611 | 3,000 | - | 178 | 60 | 13 | 9 | 1.88 | 3.50 | 1.27 | 4 | 4 | 2 | 8 | 0.22 |
| 貼片繞線電感小型開放式系列 (WL) | | | | | | | | | | | | | | |
| TRWL100505 | 4,000 | - | 178 | 60 | 13 | 9 | 0.72 | 1.19 | 0.60 | 4 | 4 | 2 | 8 | - |
| TRWL160808 | 4,000 | - | 178 | 60 | 13 | 9 | 1.35 | 1.95 | 0.95 | 4 | 4 | 2 | 8 | - |
| TRWL160808 | 4,000 | - | 178 | 60 | 13 | 9 | 1.12 | 1.85 | 0.96 | 4 | 4 | 2 | 8 | 0.23 |
| TRWL201212 | 2,000 | - | 178 | 60 | 13 | 9 | 1.85 | 2.30 | 1.45 | 4 | 4 | 2 | 8 | 0.23 |
| TRWL201212(L) | 2,000 | - | 178 | 60 | 13 | 9 | 1.80 | 2.30 | 0.90 | 4 | 4 | 2 | 8 | 0.23 |
| TRWL201212(H) | 2,000 | - | 178 | 60 | 13 | 9 | 1.85 | 2.30 | 1.45 | 4 | 4 | 2 | 8 | 0.23 |
| TRWL321611 | 2,000 | - | 178 | 60 | 13 | 9 | 1.95 | 3.50 | 1.50 | 4 | 4 | 2 | 8 | 0.23 |
| TRWL252005 | 2,000 | - | 178 | 60 | 13 | 9 | 2.70 | 2.80 | 2.00 | 4 | 4 | 2 | 8 | 0.23 |
| TRWL252005(L) | 2,000 | - | 178 | 60 | 13 | 9 | 2.70 | 2.80 | 1.50 | 4 | 4 | 2 | 8 | 0.23 |

1. Reel Dimensions

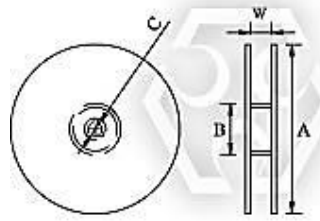


2. Tape Dimensions

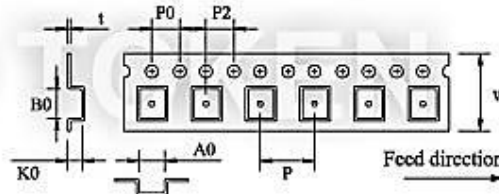


貼片電感線圈盤及編帶尺寸 (單位: mm)

| 德鍵電子貼片電感線圈型號 | 每盤個數 | | 盤尺寸 | | | | 編帶尺寸 | | | | | | | |
|------------------------------|--------|-------|-----|-----|------|------|------|-------|------|---|----|----|----|------|
| | Φ178 | Φ330 | A | B | C | W | A0 | B0 | K0 | P | P0 | P2 | W | t |
| TRWL252005(H) | 2,000 | - | 178 | 60 | 13 | 9 | 2.70 | 2.80 | 2.00 | 4 | 4 | 2 | 8 | 0.23 |
| 薄膜貼片電感系列 (AL) | | | | | | | | | | | | | | |
| TRAL100505 | 10,000 | - | 178 | 60 | 13.5 | 9.5 | 0.70 | 1.16 | 0.40 | 2 | 4 | 2 | 8 | - |
| TRAL160808 | 5,000 | - | 178 | 60 | 13.5 | 9.5 | 1.10 | 1.90 | 0.60 | 4 | 4 | 2 | 8 | - |
| 大電流積層式貼片磁珠系列 (MA) | | | | | | | | | | | | | | |
| TRMA/B100505 | 10,000 | - | 178 | 60 | 13 | 6 | 0.65 | 1.15 | 0.70 | 2 | 4 | 2 | 8 | - |
| TRMA/B160808 | 4,000 | - | 178 | 60 | 13 | 6 | 1.10 | 1.85 | 0.95 | 4 | 4 | 2 | 8 | - |
| TRMA/B201209 | 4,000 | - | 178 | 60 | 13 | 6 | 1.58 | 2.42 | 0.95 | 4 | 4 | 2 | 8 | - |
| TRMA/B321611 | 3,000 | - | 178 | 60 | 13 | 6 | 1.88 | 3.50 | 1.27 | 4 | 4 | 2 | 8 | 0.20 |
| TRMA/B321616 | 2,000 | - | 178 | 60 | 13 | 6 | 1.88 | 3.64 | 1.90 | 4 | 4 | 2 | 8 | 0.20 |
| TRMA/B322513 | 2,500 | - | 178 | 60 | 13 | 6 | 2.77 | 3.42 | 1.65 | 4 | 4 | 2 | 8 | 0.20 |
| TRMA/B451616 | 2,000 | - | 178 | 60 | 13 | 10 | 1.88 | 4.95 | 1.90 | 4 | 4 | 2 | 12 | 0.30 |
| TRMA/B453215 | 1,000 | - | 178 | 60 | 13 | 10 | 3.66 | 4.95 | 1.85 | 8 | 4 | 2 | 12 | 0.30 |
| 空芯線圈電感平面灌膠式系列 (AM) | | | | | | | | | | | | | | |
| TRAM0603 | - | 4,000 | 330 | 100 | 13 | 12.5 | 1.55 | 2.00 | 2.00 | 8 | 4 | 2 | 12 | 0.30 |
| TRAM0805 | - | 4,000 | 330 | 100 | 13 | 12.5 | 1.55 | 2.50 | 2.00 | 8 | 4 | 2 | 12 | 0.30 |
| TRAM1008 | - | 4,000 | 330 | 100 | 13 | 12.5 | 1.55 | 3.20 | 2.00 | 8 | 4 | 2 | 12 | 0.30 |
| TRAM2215 | - | 4,000 | 330 | 100 | 13 | 12.5 | 1.60 | 2.40 | 1.50 | 8 | 4 | 2 | 12 | 0.30 |
| TRAM4015 | - | 4,000 | 330 | 100 | 13 | 12.5 | 1.60 | 4.20 | 1.50 | 8 | 4 | 2 | 12 | 0.30 |
| TRAM3730 | - | 2,500 | 330 | 100 | 13 | 12.5 | 3.50 | 4.00 | 3.20 | 8 | 4 | 2 | 12 | 0.30 |
| TRAM7030 | - | 2,000 | 330 | 100 | 13 | 16.5 | 3.50 | 7.00 | 3.20 | 8 | 4 | 2 | 16 | 0.30 |
| TRAM1812 | - | 2,000 | 330 | 100 | 13 | 16.5 | 5.45 | 6.80 | 4.00 | 8 | 4 | 2 | 16 | 0.30 |
| TRAM132 | - | 1,000 | 330 | 100 | 13 | 16.5 | 4.70 | 9.10 | 4.90 | 8 | 4 | 2 | 16 | 0.30 |
| RFID 無線辨別感測器線圈系列 (TR4308I) | | | | | | | | | | | | | | |
| TR4308I | - | 3,000 | 330 | 100 | 13 | 24.5 | 3.30 | 11.55 | 2.70 | 8 | 4 | 2 | 24 | 0.35 |
| 共模 EMI 濾波器系列 (TCPWC) | | | | | | | | | | | | | | |
| TCPWCH05 | 2,000 | - | 178 | 60 | 13 | 9 | 1.40 | 2.55 | 1.35 | 4 | 4 | 2 | 8 | - |
| TCPWCH06 | 2,000 | - | 178 | 60 | 13 | 9 | 1.90 | 3.50 | 2.10 | 4 | 4 | 2 | 8 | - |
| 小型共模電感線圈貼片式系列 (TCB4F/5F/5FL) | | | | | | | | | | | | | | |
| TCB4F | - | 2,000 | 330 | 100 | 13 | 12.5 | 4.40 | 5.40 | 3.50 | 8 | 4 | 2 | 12 | 0.40 |

1. Reel Dimensions




2. Tape Dimensions

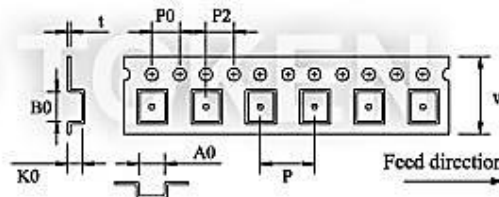


貼片電感線圈盤及編帶尺寸 (單位: mm)

| 德鍵電子貼片電感線圈型號 | 每盤個數 | | 盤尺寸 | | | | 編帶尺寸 | | | | | | | |
|---------------------------|------|-------|-----|-----|------|------|-------|-------|------|----|----|----|----|------|
| | Φ178 | Φ330 | A | B | C | W | A0 | B0 | K0 | P | P0 | P2 | W | t |
| TCB5F | - | 1,000 | 330 | 100 | 13 | 16.5 | 6.40 | 6.90 | 4.60 | 12 | 4 | 2 | 16 | 0.40 |
| TCB5FL | - | 1,500 | 330 | 100 | 13 | 16.5 | 6.40 | 6.90 | 3.95 | 12 | 4 | 2 | 16 | 0.40 |
| SMD 功率電感閉磁式系列 (RB) | | | | | | | | | | | | | | |
| TPSR63B | - | 1,500 | 330 | 100 | 13.5 | 16 | 6.50 | 7.10 | 4.55 | 12 | 4 | 2 | 16 | 0.40 |
| TPSR74B | - | 1,000 | 330 | 100 | 13.5 | 24 | 7.80 | 8.50 | 5.60 | 12 | 4 | 2 | 16 | 0.40 |
| TPSR105B | - | 500 | 330 | 100 | 13.5 | 24 | 9.65 | 10.90 | 6.00 | 12 | 4 | 2 | 24 | 0.40 |
| SMT 功率電感閉磁式系列 (RH) | | | | | | | | | | | | | | |
| TPSRH62B | - | 1,500 | 330 | 100 | 13.5 | 16 | 6.70 | 6.70 | 3.50 | 12 | 4 | 2 | 16 | 0.40 |
| TPSRH64B | - | 1,000 | 330 | 100 | 13.5 | 16 | 6.70 | 6.70 | 3.80 | 12 | 4 | 2 | 16 | 0.40 |
| TPSRH73 | - | 1,000 | 330 | 100 | 13.5 | 16 | 8.00 | 8.00 | 3.50 | 12 | 4 | 2 | 16 | 0.40 |
| TPSRH74 | - | 1,000 | 330 | 100 | 13.5 | 16 | 8.00 | 8.00 | 4.20 | 12 | 4 | 2 | 16 | 0.40 |
| TPSRH124 | - | 700 | 330 | 100 | 13.5 | 24 | 12.50 | 12.50 | 5.05 | 16 | 4 | 2 | 24 | 0.40 |
| TPSRH125 | - | 500 | 330 | 100 | 13.5 | 24 | 12.50 | 12.50 | 6.10 | 16 | 4 | 2 | 24 | 0.40 |
| TPSRH127 | - | 450 | 330 | 100 | 13.5 | 24 | 12.50 | 12.50 | 8.10 | 16 | 4 | 2 | 24 | 0.40 |
| TPSRH124B | - | 500 | 330 | 100 | 13 | 24.5 | 12.55 | 12.55 | 5.05 | 16 | 4 | 2 | 24 | 0.35 |
| TPSRH125B | - | 500 | 330 | 100 | 13 | 24.5 | 12.55 | 12.55 | 6.40 | 16 | 4 | 2 | 24 | 0.35 |
| TPSRH127B | - | 500 | 330 | 100 | 13 | 24.5 | 12.55 | 12.55 | 8.10 | 16 | 4 | 2 | 24 | 0.35 |
| TPSRH103R | - | 1,000 | 330 | 100 | 13.5 | 24 | 10.50 | 10.60 | 3.20 | 16 | 4 | 2 | 24 | 0.40 |
| TPSRH104R | - | 1,000 | 330 | 100 | 13.5 | 24 | 10.50 | 10.60 | 4.20 | 16 | 4 | 2 | 24 | 0.40 |
| TPSRH105R | - | 700 | 330 | 100 | 13.5 | 24 | 10.50 | 10.60 | 5.20 | 16 | 4 | 2 | 24 | 0.40 |
| TPSRH2D18A | - | 3,500 | 330 | 100 | 13.5 | 12 | 3.30 | 3.30 | 2.10 | 8 | 4 | 2 | 12 | 0.40 |
| TPSRH3D16A | - | 3,500 | 330 | 100 | 13.5 | 12 | 4.30 | 4.30 | 1.90 | 8 | 4 | 2 | 12 | 0.40 |
| TPSRH3D16 | - | 3,500 | 330 | 100 | 13.5 | 12 | 4.30 | 4.30 | 1.90 | 8 | 4 | 2 | 12 | 0.40 |
| TPSRH3D18 | - | 3,500 | 330 | 100 | 13.5 | 12 | 4.30 | 4.30 | 2.10 | 8 | 4 | 2 | 12 | 0.40 |
| TPSRH3D28 | - | 3,500 | 330 | 100 | 13.5 | 12 | 4.30 | 4.30 | 3.10 | 8 | 4 | 2 | 12 | 0.40 |
| TPSRH4D18 | - | 3,500 | 330 | 100 | 13.5 | 12 | 5.10 | 5.10 | 2.10 | 8 | 4 | 2 | 12 | 0.40 |
| TPSRH4D28 | - | 2,000 | 330 | 100 | 13.5 | 12 | 5.10 | 5.10 | 3.10 | 8 | 4 | 2 | 12 | 0.40 |
| TPSRH5D18 | - | 2,000 | 330 | 100 | 13.5 | 12 | 6.00 | 6.00 | 2.10 | 8 | 4 | 2 | 12 | 0.40 |
| TPSRH5D28 | - | 2,000 | 330 | 100 | 13.5 | 12 | 6.00 | 6.00 | 3.10 | 8 | 4 | 2 | 12 | 0.40 |
| TPSRH6D28 | - | 1,500 | 330 | 100 | 13.5 | 12 | 7.10 | 7.10 | 3.10 | 8 | 4 | 2 | 12 | 0.40 |
| TPSRH6D38 | - | 1,000 | 330 | 100 | 13.5 | 16 | 7.10 | 7.10 | 4.10 | 12 | 4 | 2 | 16 | 0.40 |

1. Reel Dimensions




2. Tape Dimensions

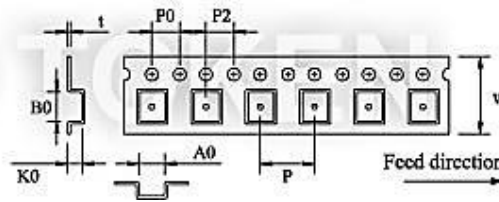


貼片電感線圈盤及編帶尺寸 (單位: mm)

| 德鍵電子貼片電感線圈型號 | 每盤個數 | | 盤尺寸 | | | | 編帶尺寸 | | | | | | | |
|---------------------|------|-------|-----|-----|------|------|-------|-------|------|----|----|----|----|------|
| | Φ178 | Φ330 | A | B | C | W | A0 | B0 | K0 | P | P0 | P2 | W | t |
| TPSRH8D28 | - | 1,000 | 330 | 100 | 13.5 | 16 | 10.50 | 8.20 | 3.20 | 12 | 4 | 2 | 16 | 0.40 |
| TPSRH8D43 | - | 500 | 330 | 100 | 13.5 | 16 | 10.50 | 8.20 | 5.00 | 12 | 4 | 2 | 16 | 0.40 |
| 功率 SMD 電感閉磁式系列 (DS) | | | | | | | | | | | | | | |
| TPSDS0620 | - | 2,000 | 330 | 100 | 13.5 | 12 | 6.20 | 6.20 | 2.10 | 8 | 4 | 2 | 12 | 0.30 |
| TPSDS0625 | - | 2,000 | 330 | 100 | 13.5 | 12 | 6.30 | 6.30 | 2.60 | 8 | 4 | 2 | 12 | 0.30 |
| TPSDS0630 | - | 2,000 | 330 | 100 | 13.5 | 16 | 6.20 | 6.20 | 3.10 | 8 | 4 | 2 | 12 | 0.40 |
| TPSDS0635 | - | 1,500 | 330 | 100 | 13.5 | 16 | 6.35 | 6.35 | 3.55 | 12 | 4 | 2 | 12 | 0.40 |
| TPSDS104 | - | 500 | 330 | 100 | 13.5 | 16 | 10.30 | 10.30 | 5.10 | 16 | 4 | 2 | 24 | 0.35 |
| TPSDS106 | - | 500 | 330 | 100 | 13.5 | 16 | 10.60 | 10.60 | 7.00 | 16 | 4 | 2 | 24 | 0.50 |
| TPSDS126 | - | 500 | 330 | 100 | 13.5 | 16 | 12.50 | 12.50 | 8.10 | 16 | 4 | 2 | 24 | 0.35 |
| SMT 功率電感閉磁式系列 (SLF) | | | | | | | | | | | | | | |
| TPSLF6028 | - | 1,500 | 330 | 100 | 13.5 | 16 | 6.20 | 6.20 | 3.20 | 12 | 4 | 2 | 16 | 0.40 |
| TPSLF7032 | - | 1,500 | 330 | 100 | 13.5 | 16 | 7.20 | 7.20 | 3.60 | 12 | 4 | 2 | 16 | 0.40 |
| TPSLF7045 | - | 1,000 | 330 | 100 | 13.5 | 16 | 7.20 | 7.20 | 5.00 | 12 | 4 | 2 | 16 | 0.40 |
| TPSLF10145 | - | 700 | 330 | 100 | 13.5 | 24 | 12.70 | 12.70 | 5.00 | 16 | 4 | 2 | 24 | 0.40 |
| TPSLF12555 | - | 500 | 330 | 100 | 13.5 | 24 | 12.70 | 12.70 | 6.00 | 16 | 4 | 2 | 24 | 0.40 |
| TPSLF12565 | - | 500 | 330 | 100 | 13.5 | 24 | 12.70 | 12.70 | 7.00 | 16 | 4 | 2 | 24 | 0.40 |
| TPSLF12575 | - | 450 | 330 | 100 | 13.5 | 24 | 12.70 | 12.70 | 8.00 | 16 | 4 | 2 | 24 | 0.40 |
| 功率 SMD 電感閉磁式系列 (DC) | | | | | | | | | | | | | | |
| TPS1608DC | - | 2,500 | 330 | 100 | 13.5 | 16.5 | 4.25 | 6.50 | 3.00 | 8 | 4 | 2 | 16 | 0.35 |
| TPS3316DC | - | 1,000 | 330 | 100 | 13.5 | 24 | 9.70 | 13.40 | 5.20 | 20 | 4 | 2 | 24 | 0.40 |
| TPS5022DC | - | 250 | 330 | 100 | 13.5 | 32 | 15.20 | 18.70 | 7.70 | 20 | 4 | 2 | 32 | 0.40 |
| 貼片功率電感閉磁式系列 (SH) | | | | | | | | | | | | | | |
| TPSH0301 | - | 3,500 | 330 | 100 | 13.5 | 12.0 | 4.30 | 4.30 | 1.40 | 8 | 4 | 2 | 12 | 0.30 |
| TPSH0302 | - | 3,500 | 330 | 100 | 13.5 | 12.0 | 4.30 | 4.30 | 1.95 | 8 | 4 | 2 | 12 | 0.30 |
| TPSH0303 | - | 2,500 | 330 | 100 | 13.5 | 12.0 | 4.30 | 4.30 | 3.00 | 8 | 4 | 2 | 12 | 0.30 |
| TPSH0501 | - | 4,000 | 330 | 100 | 13.5 | 12.0 | 5.30 | 5.30 | 1.50 | 12 | 4 | 2 | 12 | 0.30 |
| TPSH0502 | - | 3,500 | 330 | 100 | 13.5 | 12.0 | 5.30 | 5.30 | 2.05 | 12 | 4 | 2 | 12 | 0.30 |
| TPSH0503 | - | 2,500 | 330 | 100 | 13.5 | 12.0 | 5.30 | 5.30 | 3.00 | 12 | 4 | 2 | 12 | 0.30 |
| TPSH0601 | - | 1,500 | 330 | 100 | 13.5 | 16.0 | 6.30 | 6.30 | 1.10 | 12 | 4 | 2 | 16 | 0.30 |

1. Reel Dimensions

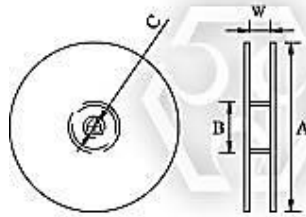


2. Tape Dimensions

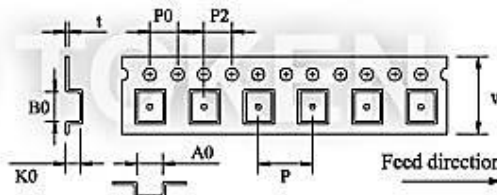


貼片電感線圈盤及編帶尺寸 (單位: mm)

| 德鍵電子貼片電感線圈型號 | 每盤個數 | | 盤尺寸 | | | | 編帶尺寸 | | | | | | | |
|-------------------|-------|-------|-----|-----|------|------|------|------|------|----|----|----|----|------|
| | Φ178 | Φ330 | A | B | C | W | A0 | B0 | K0 | P | P0 | P2 | W | t |
| TPH06015 | - | 1,500 | 330 | 100 | 13.5 | 16.0 | 6.30 | 6.30 | 1.60 | 12 | 4 | 2 | 16 | 0.30 |
| TPSH0603 | - | 1,500 | 330 | 100 | 13.5 | 16.0 | 6.30 | 6.30 | 2.10 | 12 | 4 | 2 | 16 | 0.30 |
| TPH06025 | - | 1,500 | 330 | 100 | 13.5 | 16.0 | 6.30 | 6.30 | 2.60 | 12 | 4 | 2 | 16 | 0.30 |
| TPSH0603 | - | 1,500 | 330 | 100 | 13.5 | 16.0 | 6.30 | 6.30 | 3.10 | 12 | 4 | 2 | 16 | 0.30 |
| 貼片功率電感開放式系列 (UD) | | | | | | | | | | | | | | |
| TPUD4006 | 1,000 | - | 178 | 62 | 13 | 12.5 | 5.80 | 6.30 | 1.30 | 8 | 4 | 2 | 12 | 0.40 |
| TPUD4008 | 1,000 | - | 178 | 62 | 13 | 12.5 | 5.80 | 6.30 | 1.30 | 8 | 4 | 2 | 12 | 0.40 |
| TPUD4011 | 1,000 | - | 178 | 62 | 13 | 12.5 | 4.50 | 5.60 | 1.55 | 8 | 4 | 2 | 12 | 0.40 |
| TPUD4013 | 1,000 | - | 178 | 62 | 13 | 12.5 | 4.50 | 5.60 | 1.55 | 8 | 4 | 2 | 12 | 0.40 |
| TPUD5011 | - | 4,500 | 330 | 100 | 13 | 16.5 | 5.90 | 7.50 | 1.70 | 8 | 4 | 2 | 12 | 0.40 |
| TPUD5013 | - | 4,500 | 330 | 100 | 13 | 16.5 | 5.90 | 7.50 | 1.70 | 8 | 4 | 2 | 12 | 0.40 |
| 貼片功率電感開放式系列 (UTC) | | | | | | | | | | | | | | |
| TPU31A | - | 3,500 | 330 | 100 | 13.5 | 12 | 3.5 | 4 | 1.7 | 8 | 4 | 2 | 12 | 0.40 |
| TPU31 | - | 3,500 | 330 | 100 | 13.5 | 12 | 3.5 | 4 | 1.7 | 8 | 4 | 2 | 12 | 0.40 |
| TPU32 | - | 3,000 | 330 | 100 | 13.5 | 12 | 3.5 | 4 | 2.4 | 8 | 4 | 2 | 12 | 0.40 |
| TPU42 | - | 3,000 | 330 | 100 | 13.5 | 12 | 4.5 | 5 | 2.4 | 8 | 4 | 2 | 12 | 0.40 |
| TPU43 | - | 2,000 | 330 | 100 | 13.5 | 12 | 4.5 | 5 | 3.8 | 8 | 4 | 2 | 12 | 0.40 |
| TPU52 | - | 2,500 | 330 | 100 | 13.5 | 16 | 5.70 | 6.3 | 2.4 | 8 | 4 | 2 | 16 | 0.40 |
| TPU53 | - | 2,000 | 330 | 100 | 13.5 | 16 | 5.70 | 6.3 | 3.8 | 8 | 4 | 2 | 16 | 0.40 |
| TPU54 | - | 1,500 | 330 | 100 | 13.5 | 16 | 5.70 | 6.3 | 4.8 | 8 | 4 | 2 | 16 | 0.40 |
| TPU73 | - | 1,000 | 330 | 100 | 13.5 | 24 | 7.70 | 8.4 | 4.3 | 12 | 4 | 2 | 24 | 0.40 |
| TPU75 | - | 1,000 | 330 | 100 | 13.5 | 24 | 7.70 | 8.4 | 5.6 | 12 | 4 | 2 | 24 | 0.40 |
| TPU104 | - | 1,000 | 330 | 100 | 13.5 | 24 | 9.65 | 10.9 | 4.3 | 12 | 4 | 2 | 24 | 0.40 |
| TPU105 | - | 900 | 330 | 100 | 13.5 | 24 | 9.65 | 10.9 | 5.7 | 12 | 4 | 2 | 24 | 0.40 |
| TPU106 | - | 500 | 330 | 100 | 13.5 | 24 | 9.65 | 10.9 | 6.5 | 12 | 4 | 2 | 24 | 0.40 |
| 貼片功率電感開放式系列 (ULF) | | | | | | | | | | | | | | |
| TPULF7032 | - | 1,500 | 330 | 100 | 13.5 | 16 | 7.20 | 7.20 | 3.60 | 12 | 4 | 2 | 16 | 0.40 |
| TPULF7045 | - | 1,000 | 330 | 100 | 13.5 | 16 | 7.20 | 7.20 | 5.00 | 12 | 4 | 2 | 16 | 0.40 |
| 貼片功率電感開放式系列 (UDF) | | | | | | | | | | | | | | |
| TPU1608DF | - | 2,500 | 330 | 100 | 13.5 | 16 | 4.25 | 6.50 | 3.00 | 8 | 4 | 2 | 16 | 0.40 |

1. Reel Dimensions



2. Tape Dimensions

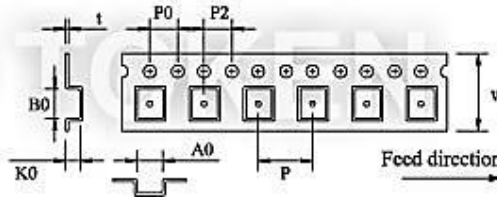

貼片電感線圈盤及編帶尺寸 (單位: mm)

| 德鍵電子貼片電感 線圈型號 | 每盤個數 | | 盤尺寸 | | | | 編帶尺寸 | | | | | | | |
|---------------------|------|-------|-----|-----|------|------|-------|-------|-------|----|----|----|----|------|
| | Φ178 | Φ330 | A | B | C | W | A0 | B0 | K0 | P | P0 | P2 | W | t |
| TPU3308DF | - | 1,000 | 330 | 100 | 13.5 | 24 | 9.70 | 13.40 | 3.10 | 20 | 4 | 2 | 24 | 0.40 |
| TPU3316DF | - | 1,000 | 330 | 100 | 13.5 | 24 | 9.70 | 13.40 | 5.20 | 20 | 4 | 2 | 24 | 0.40 |
| TPU3340DF | - | 250 | 330 | 100 | 13.5 | 24 | 9.70 | 13.40 | 11.50 | 20 | 4 | 2 | 24 | 0.40 |
| TPU5022DF | - | 250 | 330 | 100 | 13.5 | 32 | 15.20 | 18.70 | 7.70 | 20 | 4 | 2 | 32 | 0.40 |
| 貼片功率電感開放式系列 (UDHP) | | | | | | | | | | | | | | |
| TPU1813DHP | - | 1,500 | 330 | 100 | 13.5 | 16 | 6.30 | 9.10 | 5.60 | 12 | 4 | 2 | 16 | 0.40 |
| TPU3316DHP | - | 1,000 | 330 | 100 | 13.5 | 24 | 10.10 | 13.40 | 6.60 | 20 | 4 | 2 | 24 | 0.40 |
| TPU5022DHP | - | 250 | 330 | 100 | 13.5 | 32 | 15.40 | 22.50 | 7.30 | 20 | 4 | 2 | 32 | 0.40 |
| 功率背光貼片電感閉磁式系列 (DBL) | | | | | | | | | | | | | | |
| TPS1608DBL | - | 2,500 | 330 | 100 | 13 | 16.5 | 4.25 | 6.50 | 3.00 | 8 | 4 | 2 | 16 | 0.35 |
| 環型貼片功率電感器 (TX) | | | | | | | | | | | | | | |
| TPUTX-2P/2S | - | 500 | 330 | 100 | 13 | 24.5 | 10.25 | 10.25 | 5.50 | 16 | 4 | 2 | 24 | 0.40 |
| TPUTX-4P/4S | - | 500 | 330 | 100 | 13 | 24.5 | 12.70 | 12.70 | 7.00 | 16 | 4 | 2 | 24 | 0.40 |